

# WIRED FIDELITY, WIRELESSLY.\*




Bowers & Wilkins



FORMATION DUO

Introducing Bowers & Wilkins Formation Duo – the first wireless speakers that live up to the exacting audiophile standards of Bowers & Wilkins. Each one features our patented, Carbon Dome, tweeter-on-top technology for crystal clear highs, and the same innovative Continuum cone driver found on our industry-defining 800 Series Diamond speakers. When coupled with our exclusive Formation® Wireless Technology that produces an immersive, seamless, high-fidelity soundstage, we are redefining “wireless audio” – true to our groundbreaking heritage. Formation Duo is wired fidelity, wirelessly\* – and why we like to think that they are the Highest Form of Sound™.

\*Fidelity refers to Superlative Bowers & Wilkins Sound.

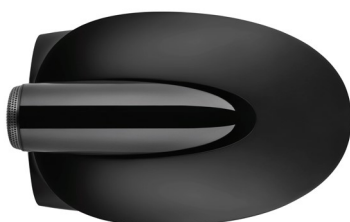

<b>Model</b>	Formation Duo
<b>Description</b>	Wireless High Performance Speaker System
<b>Technical features</b>	Apple® AirPlay 2® technology Spotify® Connect Room Ready Bluetooth In Digital Signal Processing (DSP) Digital amplifier Dynamic EQ
<b>Drive units</b>	1x ø25mm (1 in) Carbon dome high-frequency 1x ø165mm (6.5 in) Continuum cone bass midrange
<b>Frequency response</b>	25Hz to 33kHz
<b>Amplifier power output</b>	2 x 125W
<b>Input voltage</b>	100V – 240V – 50/60Hz
<b>Power consumption</b>	Below 6 Watts (Sleep)*
<b>Connections</b>	Network (RJ45 Ethernet or WiFi) USB – service only
<b>Bluetooth</b>	Bluetooth® v4.1, Class 2 aptX HD AAC SBC
<b>Dimensions</b>	Height: 395mm (15.6 in) Width: 197mm (7.8 in) Depth: 305mm (12 in)
<b>Weight</b>	10.6kg (23.4 lb)
<b>AirPlay 2 compatibility</b>	iPhone, iPad, and iPod touch with iOS 11.4 or later, Apple TV 4K or Apple TV (4th Generation) with tv OS 11.4 or later, Mac or PC with iTunes 12.8 or later.

\*Formation products create a mesh network. Each product in this network dynamically chooses the optimal path to route audio-data between products, in order to ensure a robust streaming experience. We have therefore certified Formation products for High Network Availability (HiNA) and conform to the appropriate power requirements set out in the ERP directive.